



For fine sanding work and most minute correction.




Disc sander TG 125/E

For all wood types, steel, non-ferrous metals, precious metals, plastics (also Plexiglas and glass-fibre reinforced plastics).

Powerful drive and vibration-free running thanks to balanced DC motor. Variable sanding speeds from 250 - 800m/min. Housing of glass-fibre reinforced POLYAMIDE. Aluminium table tilting downwards through 50°, 10° upwards, with angle stop. Planeturned sanding disc of die-cast aluminium covered with silicone film. This allows for effortless removal of sanding discs after use.

Two additional square silicone films offer easy storage after use and thus re-use when needed.

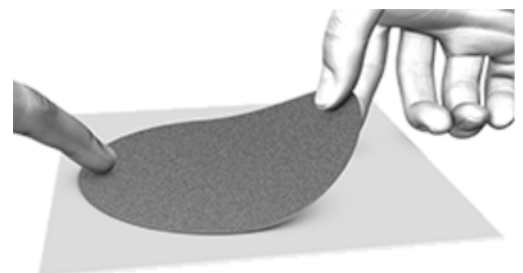



With associated horizontal C-clamp (with table), but can also be fixed vertically quickly and safely (to sharpen tools).

With each 2 sanding discs grit 80, grit 150 and grit 240.

Technical data:

230V. 140W. 50/60Hz. Adjustable grinding speed of approx. 250 - 800m/min (corresponds to 1,150 - 3,600rpm). Sanding disc Ø 125mm. Table 98 x 140mm. Sanding height 62.5mm. Size 300 x 140 x 160mm. Weight approx. 3kg.

NO 27 060



Use the vacuum cleaner adapter to keep your work area cleaner. We recommend the use of our Automatic workshop vacuum-cleaner WSA.



See us on YouTube!

Self-adhesive white corundum sanding discs for TG 125/E

Industrial quality. For sanding soft and hard woods, chipboards, fibre boards, non-ferrous metals, steel, plastics, cork, rubber and minerals. Ø 125mm. One quadratic silicone film for storage and reuse of used sanding discs is included.

NO 28 160	grit	80	5 pieces
NO 28 162	grit	150	5 pieces
NO 28 164	grit	240	5 pieces

